

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
14 December 2000 (14.12.2000)


PCT

(10) International Publication Number  
WO 00/76115 A1

- (51) International Patent Classification<sup>7</sup>: H04L 5/06, 27/26
- (21) International Application Number: PCT/SE00/01145
- (22) International Filing Date: 2 June 2000 (02.06.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
9902077-8 4 June 1999 (04.06.1999) SE
- (71) Applicant (for all designated States except US): TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): BOSTRÖM, Jan [SE/SE]; G:a Huddingevägen 447, S-125 42 Älvsjö (SE). SVEVAR, Magnus [SE/SE]; Hågerstensvägen 163B, S-126 53 Hågersten (SE).
- (74) Agents: BERGENTALL, Annika et al.; Cegumark AB, P.O. Box 53047, S-400 14 Göteborg (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— With international search report.  
— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

[Continued on next page]

(54) Title: METHOD AND DEVICE IN A MULTI-TONE TRANSMISSION SYSTEM

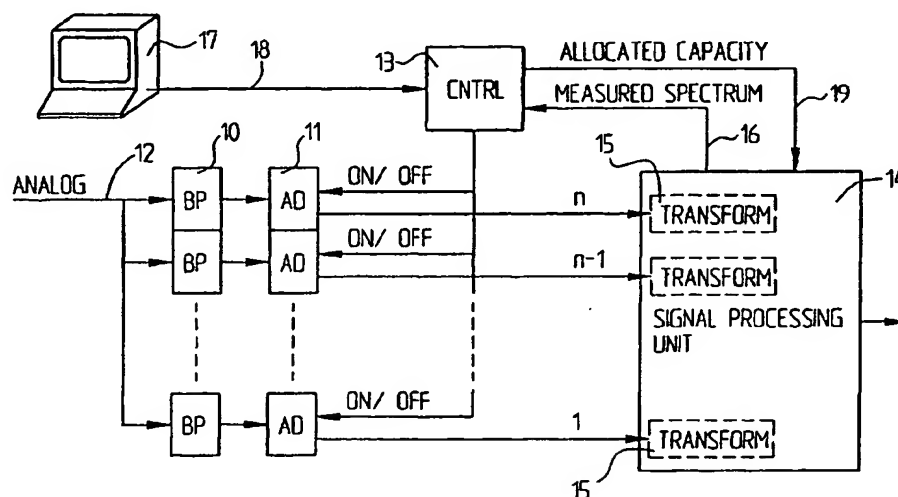

(57) Abstract: Method in a multi-tone transmission system wherein a usable frequency range of a channel is separated into a plurality of frequency bands, an analogue signal in each sub band being filtered out by a plurality of band pass filters at a receiving side. The method comprises the steps of converting separately the analogue signal in each sub band into a digital signal in a plurality of Analogue-Digital converters (11), each Analogue-Digital converter being associated to one sub band, and activating and deactivating each Analogue-Digital converter in dependence of the presence of a signal in the associated sub band. A plurality of bandpass filters (10) is operatively connected to an analogue line (12) at a receiving side. Each bandpass filter is operatively connected to an Analogue-Digital converter (11) for converting an analogue signal into a digital signal. A control unit (13) is operatively connected to each of said Analogue-Digital converters (11) for activating and deactivating each converter.

Best Available Copy

WO 00/76115 A1

WO 00/76115 A1



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

Title:

5 METHOD AND DEVICE IN A MULTI-TONE TRANSMISSION SYSTEM

#### FIELD OF THE INVENTION

The invention relates to a method and a device in a multi-tone  
10 transmission system. Discrete MultiTone (DMT) modulation is a  
method by which the usable frequency range of a channel is  
separated into a plurality of frequency bands, for instance 256  
bands. By dividing the frequency spectrum into multiple channels  
DMT is thought to perform better in the presence of interference  
15 sources such as AM radio transmitters. It is also better able to  
focus its transmit power on those portions of the spectrum in  
which it is profitable to send data. DMT forms the basis for  
Asymmetric Digital Subscriber Line (ADSL) and Very high speed  
Digital Subscriber Line (VDSL). Therefore, the bandwidth used in  
20 a channel is adaptive. Depending on the transmission  
characteristics a DMT system can use parts of the allowed  
spectrum.

#### STATE OF THE ART

25 For the above described systems presently available receivers use  
a single wideband analogue-digital converter with high resolution.  
This results in a high power consumption that is independent of  
the used bandwidth. In many applications a high power consumption  
constitutes a major problem. The digital signal is processed in a  
30 Digital Signal Processing unit (DSP) which is dimensioned to  
handle the full bandwidth. A drawback in such a configuration is  
that unnecessary operations are performed if only a part of the  
frequency spectrum is used.

## SUMMARY OF THE INVENTION

An object of the present invention is to overcome the problems and drawbacks of prior art systems. According to the invention there is provided a plurality of analogue-digital converters for  
5 converting separately the analogue signal in each sub band into a digital signal. Each analogue-digital converter is associated to one sub band, and each analogue-digital converter is activated and deactivated in dependence of the presence of a signal in the associated sub band. In accordance with the invention the overall  
10 power consumption is decreased and the available bandwidth can be used more efficiently. Power is saved in both the Analogue and the Digital domain.

Further features and advantages of the invention appear in the  
15 description below and in the accompanying drawing and dependent claims.

## BRIEF DESCRIPTION OF THE DRAWINGS

The invention will in the following be further described in a non-limiting way and with reference to the accompanying drawing. Fig  
20 1, which is a schematic functional block diagram showing one embodiment of a device in accordance with the invention.

## DETAILED DESCRIPTION OF THE INVENTION

25 As shown in the figure a system in accordance with the invention comprises a plurality of band pass filters 10 together forming a filter bank. The transmission spectrum is subdivided into N spectral parts. The band pass filters 10 are connected to a line 12 through which an analogue signal is received. Each of the band  
30 pass filters 10 is connected to an analogue-digital converter 11 for converting the analogue DMT signal into a digital signal. The spectrum of each part n can be sampled at a base band rate due to

the band pass character of the spectrum received by each A/D converter.

The bands are intimately connected to the FFT (fast Fourier  
5 transform) algorithm which DMT uses as its modulator and  
demodulator. The FFT is used to separate the frequencies into  
individual bands and it generates spectra, which are fully  
separable on the receiving end. Instead of FFT the discrete  
wavelet transform may be used. Normally, the discrete wavelet  
10 transform will do a better job of isolating the individual  
frequency spectra.

The assignment of channels is left flexible, but e.g. ADSL uses  
channels 6-31 for upstream (24KHz-136KHz), 32-250 for downstream  
15 (136KHz-1.1MHz). The modulation used on any given frequency  
channel is QAM. Channels 16 and 64 are reserved for pilot tones  
which are used to recover timing. The number of bits per symbol  
within each channel may be independently selected allowing the  
modem to be rate adaptive. Other systems, e.g. VDSL will use  
20 other settings.

A control unit 13 individually controls each analogue-digital  
converter 11. The control unit may switch the converters 11 on and  
off and also perform other control tasks such as assigning other  
25 lines or channels to the converters.

The digital signals from each of the analogue-digital converters  
11 are supplied to entities 15 of a signal processing unit 14.  
These entities can be physical blocks or logical functions in a  
30 DSP and are dedicated for a separate part of the available  
bandwidth. While the input to each A/D converter is band pass  
filtered only the information for the tones in the passband will  
be present in the A/D converted signal. The signal processing unit

14 performs the appropriate digital filtering, transformation and detection of the tones in each part of the band.

5 As the filterbank divides the analogue signal into N bands each subband will be independent of the other bands after the filter bank. If the bandwidth for subband  $n > x$ ,  $n \leq N$  is not used for transmission the A/D converters and corresponding signal processing entities 15 for  $n > x$  will be switched off by the control unit 13.

10

In a multi receiver implementation a processor pool can be envisioned as a practical embodiment and each receiver path would be allocated the required processing capabilities from the pool. This could be both physical processing blocks such as FFT kernels or capacity in a generic DSP. In this way it is possible to avoid the allocation of resources that are not needed, and parts of the processor pool can be powered down or be used to accommodate more channels or more demanding coding schemes.

20 The control unit 13 will control the A/D converters and/or the entities 15 of the signal processing unit 14 in dependence of how the spectrum is used. The use of the spectrum can be determined by the signal processing unit 14 which continuously can monitor the complete spectrum. Information indicative of the use of the spectrum is transferred to the control unit through a first control line 16. It is possible also to determine the use of the spectrum manually and to transfer control information from a manually operated means 17, such as a computer, through a second control line 18. A third control line 19 is used by the control unit 13 to inform the signal processing unit 14 about the allocated capacity.

30

In a practical embodiment an analogue front-end may comprise ten A/D converters and ten band pass filters in a central office side. This side is capable of handling one VDSL channel. The signal processing unit 14 can be a common pool of DSP:s that serves a lot of channels.

By connecting an ADSL modem at the consumer side only about one tenth of the available bandwidth is used. As a result most of the A/D converters can be turned of by the control unit 13 and the excess signal processing power can be used for more lines and to handle the more demanding coding used in ADSL. If more channels are to be used more analogue front ends are required.

The described system is very well suited for multi tone based copper access modems especially using DMT. It is however applicable in all multi tone based transmission systems. Other suitable applications lay in systems where power consumption is a critical factor and the used transmission bandwidth can be varied. Systems based on DMT or Wavelettransform with dynamic bandwidth allocation as a result of different bitcapacity demands and channel characteristics is especially suitable for these methods.

## CLAIMS

1. Method in a multi-tone transmission system wherein a usable  
5 frequency range of a channel is separated into a plurality of  
frequency bands, an analogue signal in each sub band being  
filtered out by a plurality of band pass filters at a receiving  
side,  
c h a r a c t e r i z e d    b y  
10 converting separately the analogue signal in each sub band into a  
digital signal in a plurality of analogue-digital converters, each  
analogue-digital converter being associated to one sub band, and  
activating and deactivating each analogue-digital converter in  
dependence of the presence of a signal in the associated sub band.  
15
2. Method as claimed in claim 1,  
further including the step of processing separately each digital  
signal in each subband in a signal processing unit (14).
- 20 3. Method as claimed in claim 2,  
further including the step of detecting presence of a signal in  
the associated sub band in said signal processing unit (14).
4. A device in a multi-tone transmission system, wherein a  
25 plurality of bandpass filters (10) is operatively connected to an  
analogue line (12) at a receiving side, so as to separate a  
usable frequency range of a channel into a plurality of  
frequency bands,  
c h a r a c t e r i z e d    i n  
30 that each bandpass filter is operatively connected to an  
Analogue-Digital converter (11) for converting an analogue  
signal into a digital signal, each Analogue-Digital converter  
being associated to one sub band, and



that, a control unit (13) is operatively connected to each of said Analogue-Digital converters (11) for activating and deactivating each converter in dependence of the presence of a signal in the associated sub band.

5

5. A device as claimed in claim 4,  
wherein a signal processing entity (15) is provided for each digital signal.

10

6. A device as claimed in claim 4,  
wherein a single signal processing unit (14) is provided for said digital signals.

15

7. A device as claimed in claim 4,  
wherein said signal processing unit (14) is operatively connected to manually operated means (17) for receiving control information for said Analogue-Digital converters (11).

1/1

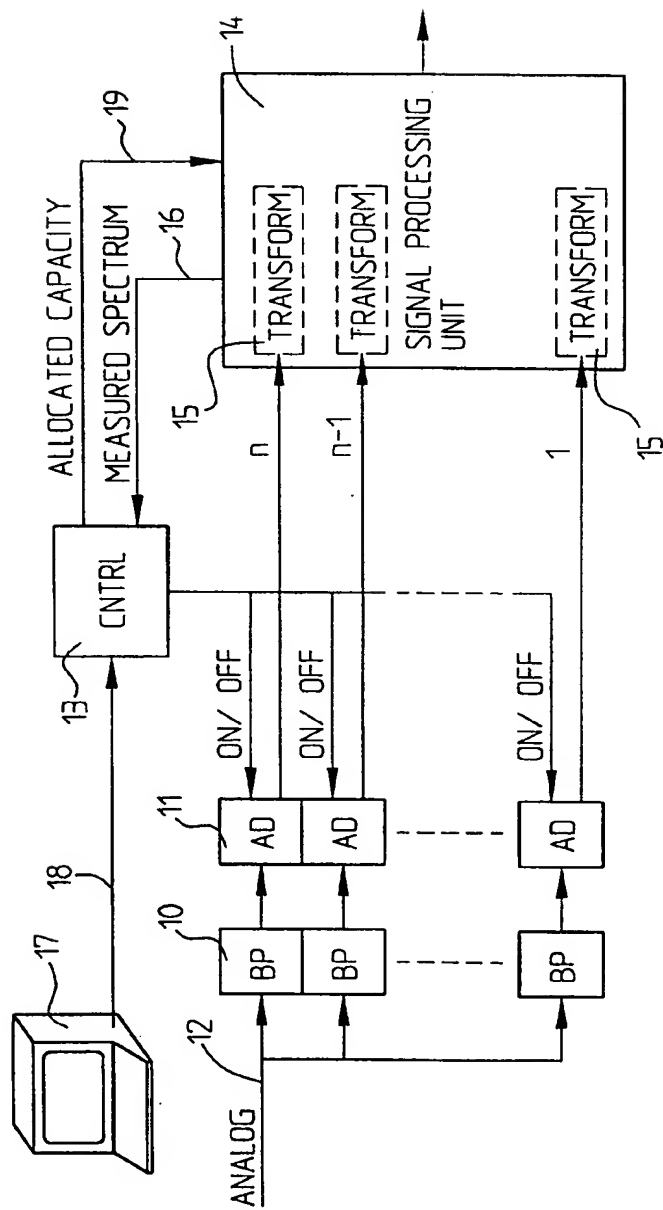


Fig. 1

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/01145

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04L 5/06, H04L 27/26

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0889615 A2 (INTEGRATED TELECOM EXPRESS), 7 January 1999 (07.01.99), page 8, line 26 - line 43  --	1-7
A	GB 2326070 A (LSI LOGIC CORPORATION), 9 December 1998 (09.12.98), page 2, line 1 - line 14  --	1-7
A	US 5323391 A (R.M. HARRISON), 21 June 1994 (21.06.94), column 3, line 58 - line 61; column 6, line 22 - line 52  --	1-7

☒ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

29 Sept 2000

Date of mailing of the international search report

04 -10- 2000

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Peder Gjervaldsaeter/AE

Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/01145

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4639911 A (E. ROZA ET AL.), 27 January 1987 (27.01.87), column 2, line 22 - line 42  -- -----	1-7

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

01/08/00

International application No.  
PCT/SE 00/01145

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
EP	0889615	A2	07/01/99	JP	11088920 A	30/03/99
GB	2326070	A	09/12/98	GB	9809587 D	00/00/00
				EP	0876031 A	04/11/98
				EP	0877526 A	11/11/98
				GB	2325125 A	11/11/98
				GB	2325126 A	11/11/98
				GB	2325127 A	11/11/98
				GB	2325128 A	11/11/98
				GB	2325129 A	11/11/98
				GB	2325825 A	02/12/98
				GB	2326069 A	09/12/98
				GB	9709063 D	00/00/00
				GB	9808989 D	00/00/00
				GB	9808990 D	00/00/00
				GB	9808991 D	00/00/00
				GB	9808992 D	00/00/00
				GB	9808993 D	00/00/00
				GB	9809462 D	00/00/00
				GB	9809585 D	00/00/00
				GB	9727112 D	00/00/00
US	5323391	A	21/06/94	CA	2117920 A,C	15/09/94
				EP	0643887 A	22/03/95
				FI	945235 A	07/11/94
				JP	7506711 T	20/07/95
				KR	153223 B	16/11/98
				SG	46376 A	20/02/98
				WO	9421061 A	15/09/94
				CA	2117336 A	27/04/94
				EP	0623265 A	09/11/94
				FI	943005 A	22/06/94
				IL	107210 A	18/06/96
				JP	8502868 T	26/03/96
				KR	9702238 B	26/02/97
				SE	9402220 D	00/00/00
				US	5396489 A	07/03/95
				WO	9410772 A	11/05/94
US	4639911	A	27/01/87	DE	3331936 A,C	22/03/84
				FR	2533393 A,B	23/03/84
				GB	2128454 A,B	26/04/84
				GB	8324589 D	00/00/00
				JP	1859894 C	27/07/94
				JP	2501713 B	29/05/96
				JP	5078991 B	29/10/93
				JP	5130608 A	25/05/93
				JP	59072886 A	24/04/84
				NL	8203599 A	16/04/84

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**